



Quantum Comms Travel Towers





2015 Isuzu FTS 800 4x4


LV Insulated—15m

Maximum working height: 15m

Max wind speed: 12.5 m/s

Safe working load: 250kg

Gross vehicle weight: 20.5t

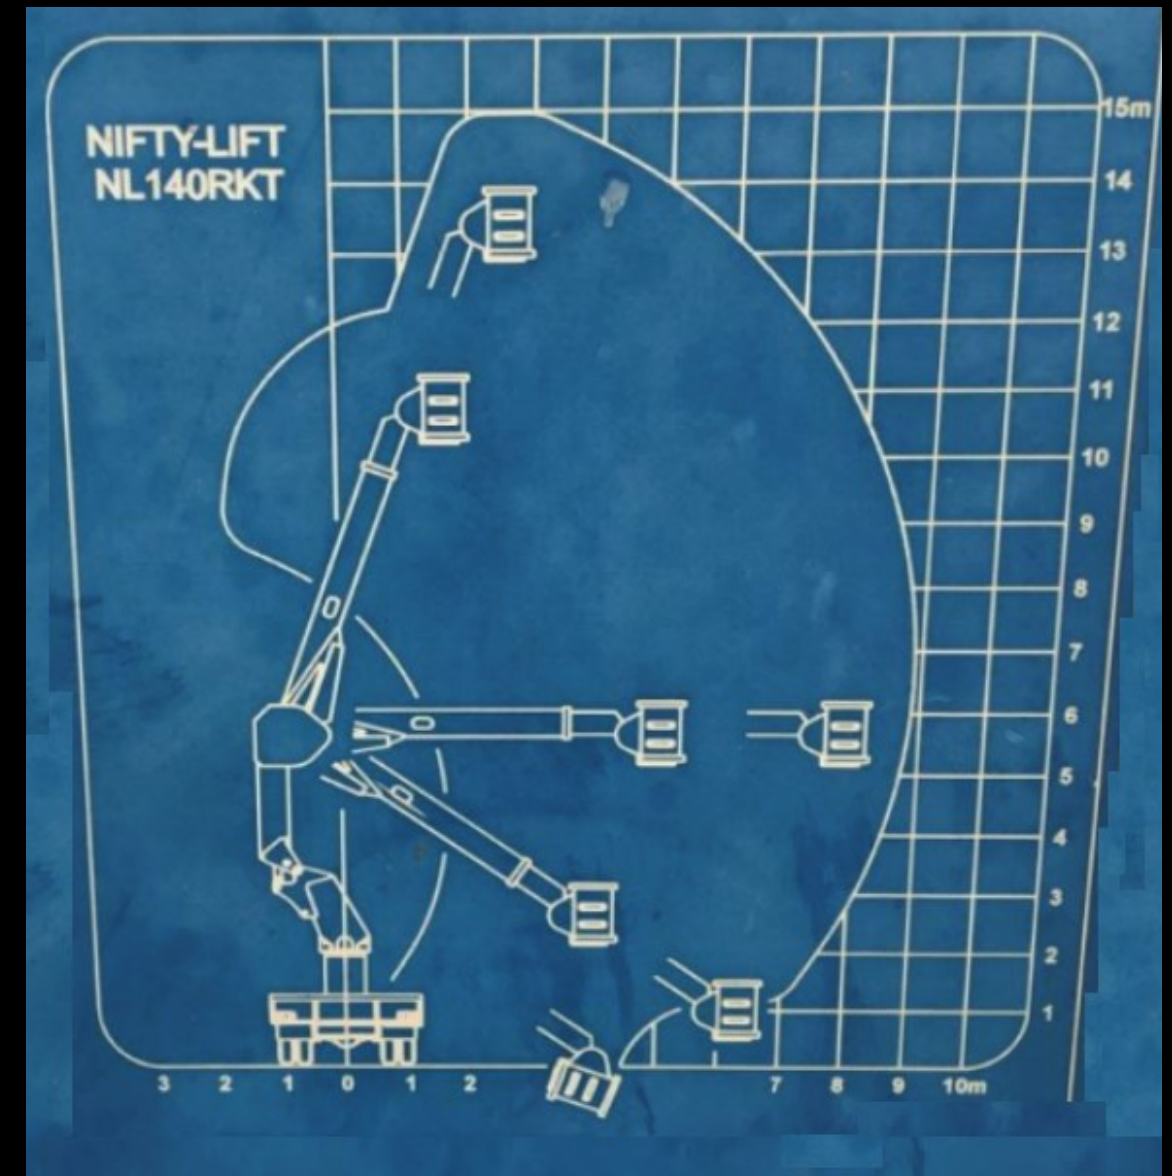



Scania 8x8 P360CB8x8HH2

Bronto S 70 XDT —70m

Maximum working height: 70m

Maximum working outreach: 36m

Safe working load: 120kg—700kg



Transportation height: 4.25m

Transportation length: 12.5m

Transportation width: 2.5m

Gross vehicle weight: 37.5t



QCC—Support breast cancer

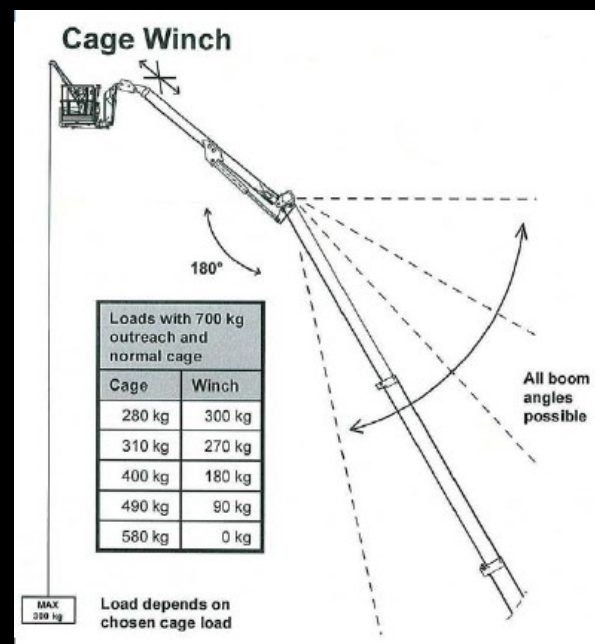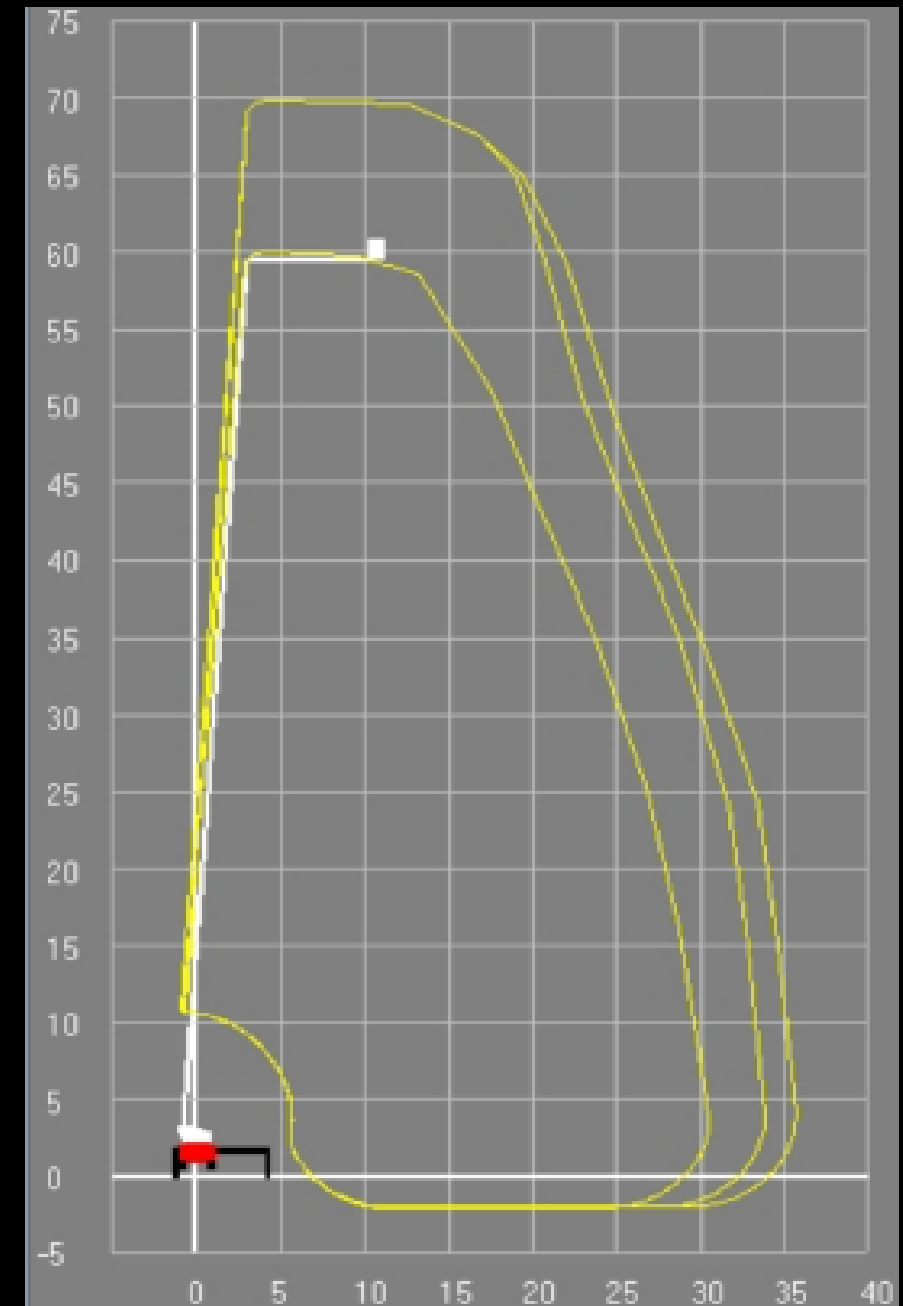



MAN TGS33.40 6x6—54M

- Maximum working height 54.0m
- Maximum outreach 40.0m
- Range of rotation 500°
- Size of working cage (extendable). 2.42-3.82x0.97m
 - Carrying capacity of working cage. 600kg
- Carrying capacity of working cage with extended upper boom. 320kg
 - Overall height 3.75 – 3.99m
 - Vehicle width. 2.55m
 - Total length of vehicle 11.94m
- Jacked width (outer edge of jack plates) 8.95m
 - Total weight 25,000kg approx.

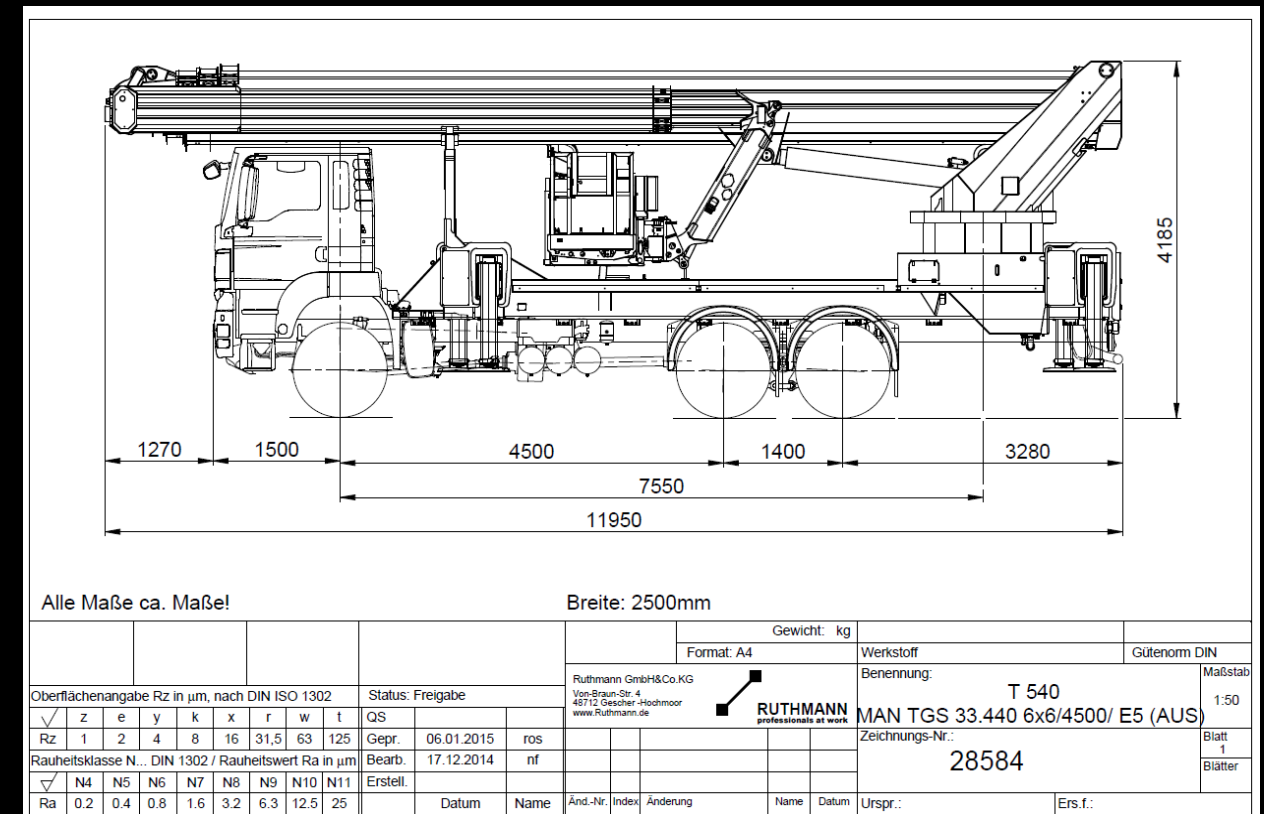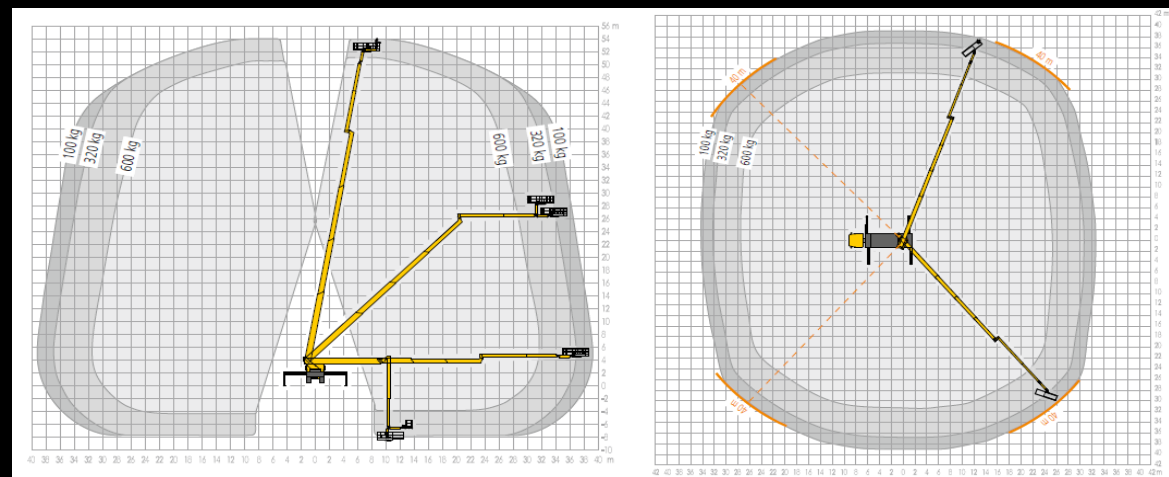




Scania 8x8 P114CB8X8HZ340

Bronto—55M

- Safe Working load: 700kg
- Max. permitted wind speed: 12.5 m/s
 - Typical GVW: 32.0 ton
- Min. operating weight: 30.5 ton
- Outrigger width and length
 - normal jacking: 6.0/6.75m
 - one side jacking: 4.4/6.75 m
 - narrow jacking: 2.8/6.75m

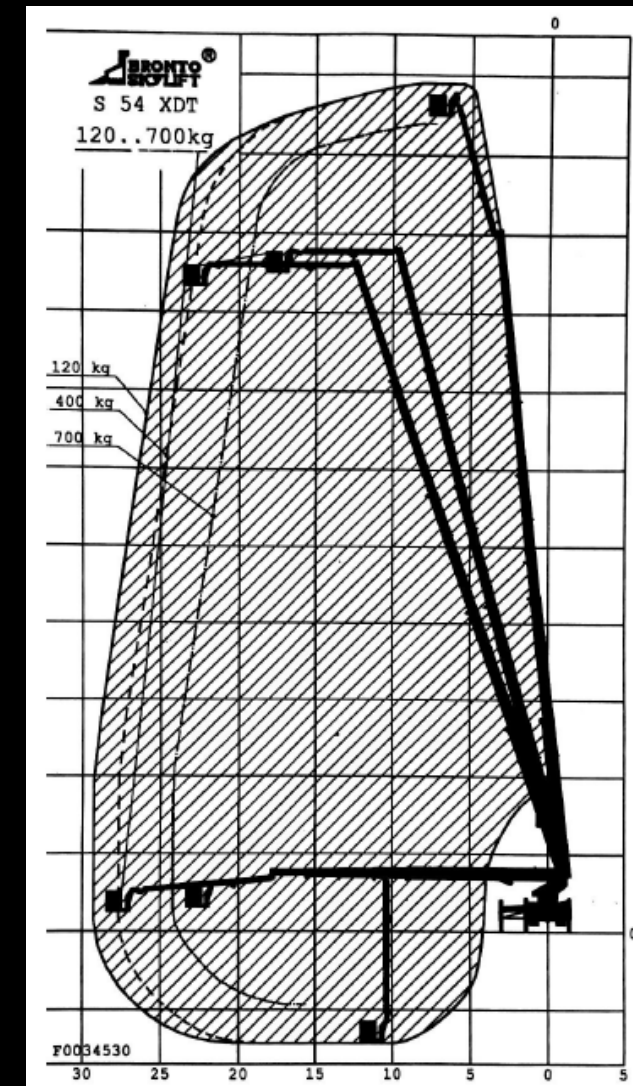



SCANIA P94 Cella 450 - 45M

Safe working load max: 250kg


Max. permitted wind speed: 12.5 m/s

Typical GVW: 18 ton

Operating weight min: 17 ton

Outrigger width and length c/c

- normal jacking: 6.2/5.85 m
- Narrow jacking: 2.8/5.85 m
- One side jacking: 4.5/5.85 m

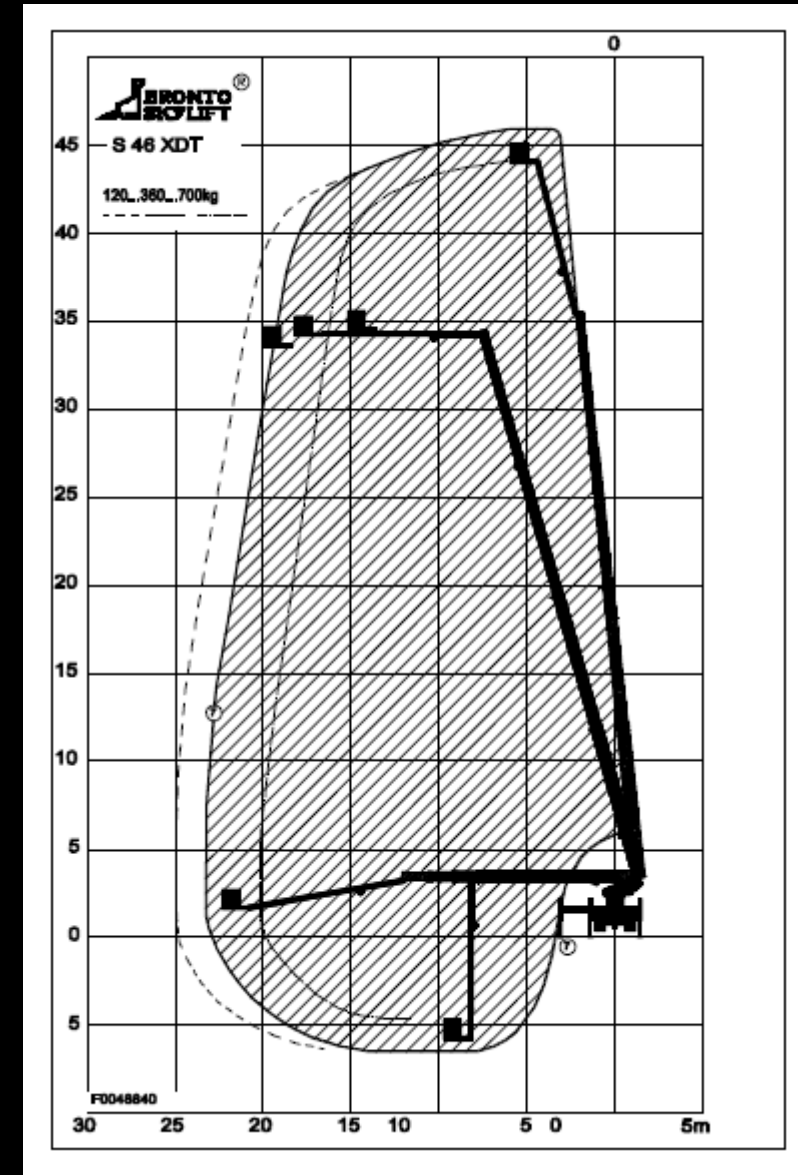



SCANIA P400 6X6— 46M

Safe working load max: 600kg


Max. permitted wind speed: 12.5 m/s

Typical GVW: 18 ton

Operating weight min: 17 ton

Outrigger width and length c/c

- normal jacking: 6.2/5.85 m
- Narrow jacking: 2.8/5.85 m
- One side jacking: 4.5/5.85 m

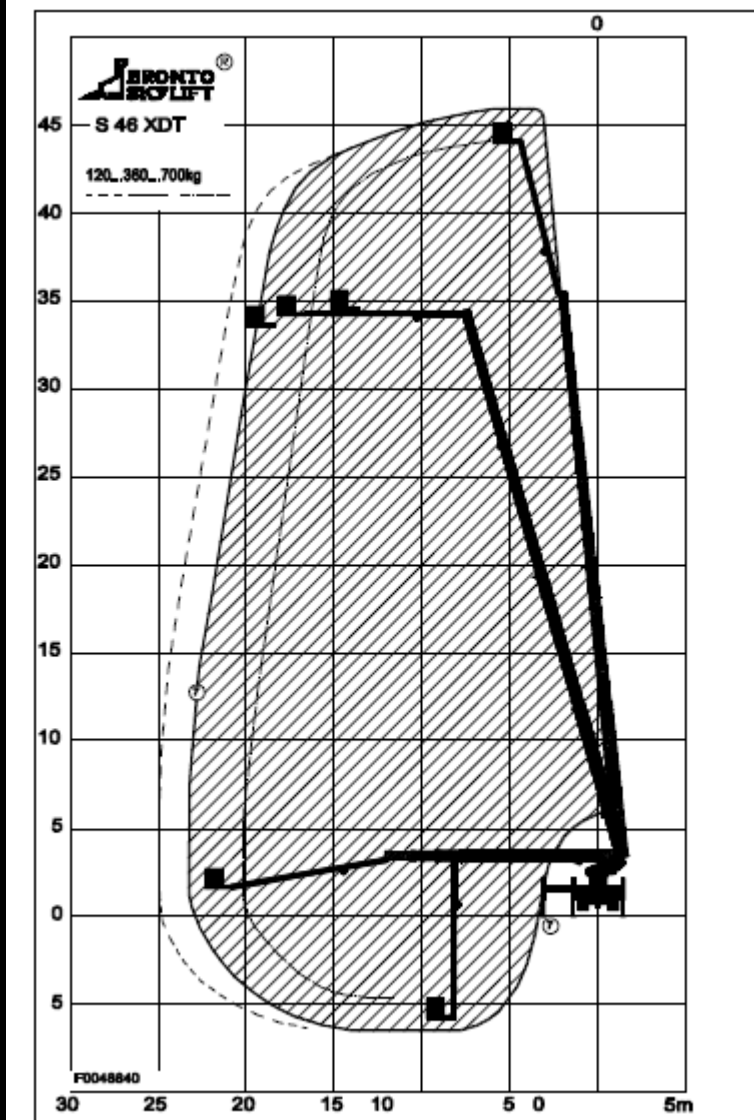



Length m 11.800



Width m 2.500

Overall weight on ground Kg 35.500

Jack supporting surface:

Centre distance in width mm 2300/5500

Centre distance in length mm 6500

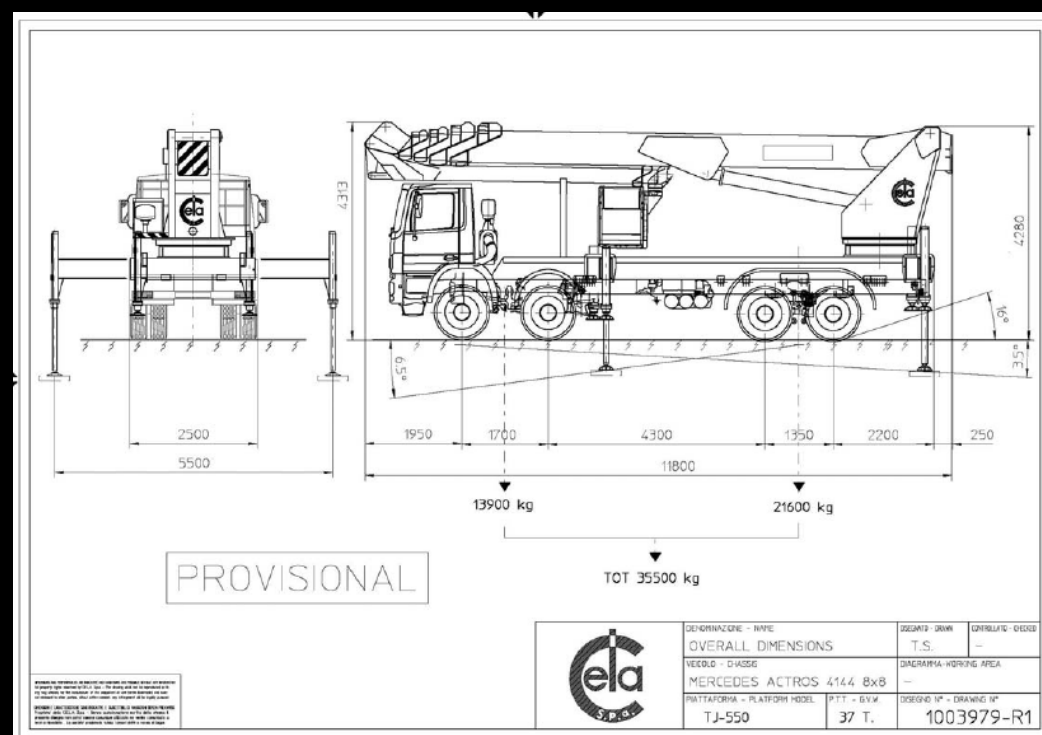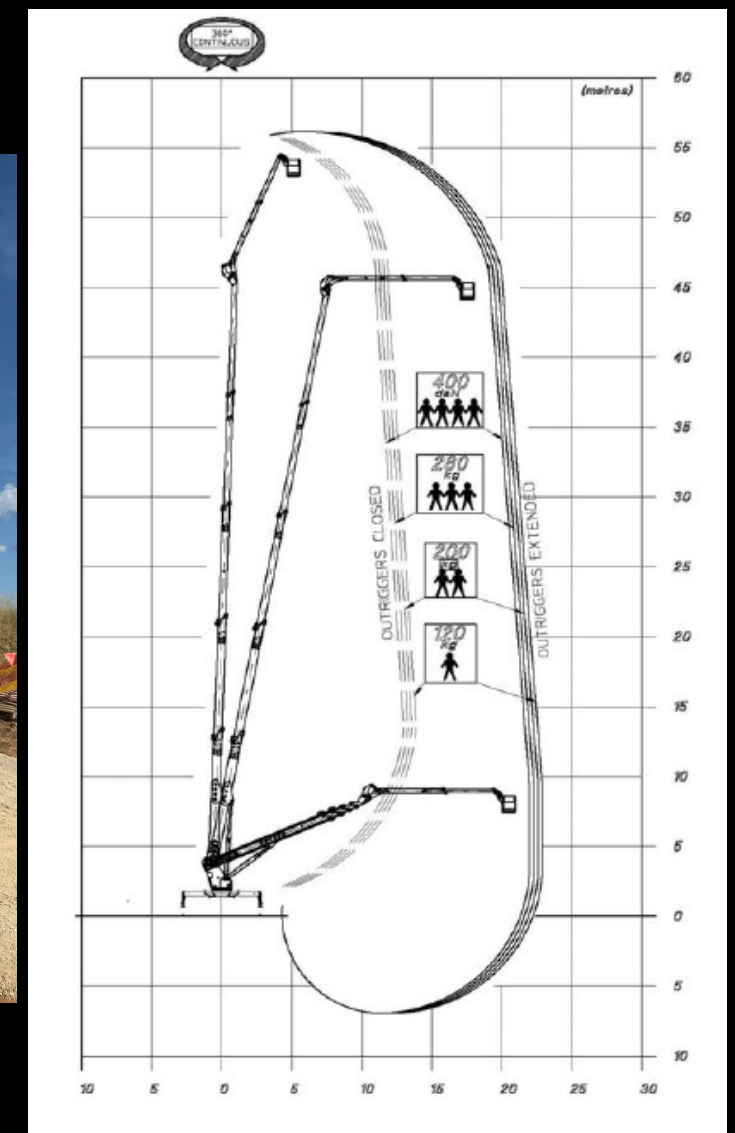




Scania 8x8 P114CB8X8HZ340

Bronto—55m

- Safe Working load: 700kg
- Max. permitted wind speed: 12.5 m/s
 - Typical GVW: 32.0 ton
- Min. operating weight: 30.5 ton
- Outrigger width and length
 - normal jacking: 6.0/6.75m
 - one side jacking: 4.4/6.75 m
 - narrow jacking: 2.8/6.75m

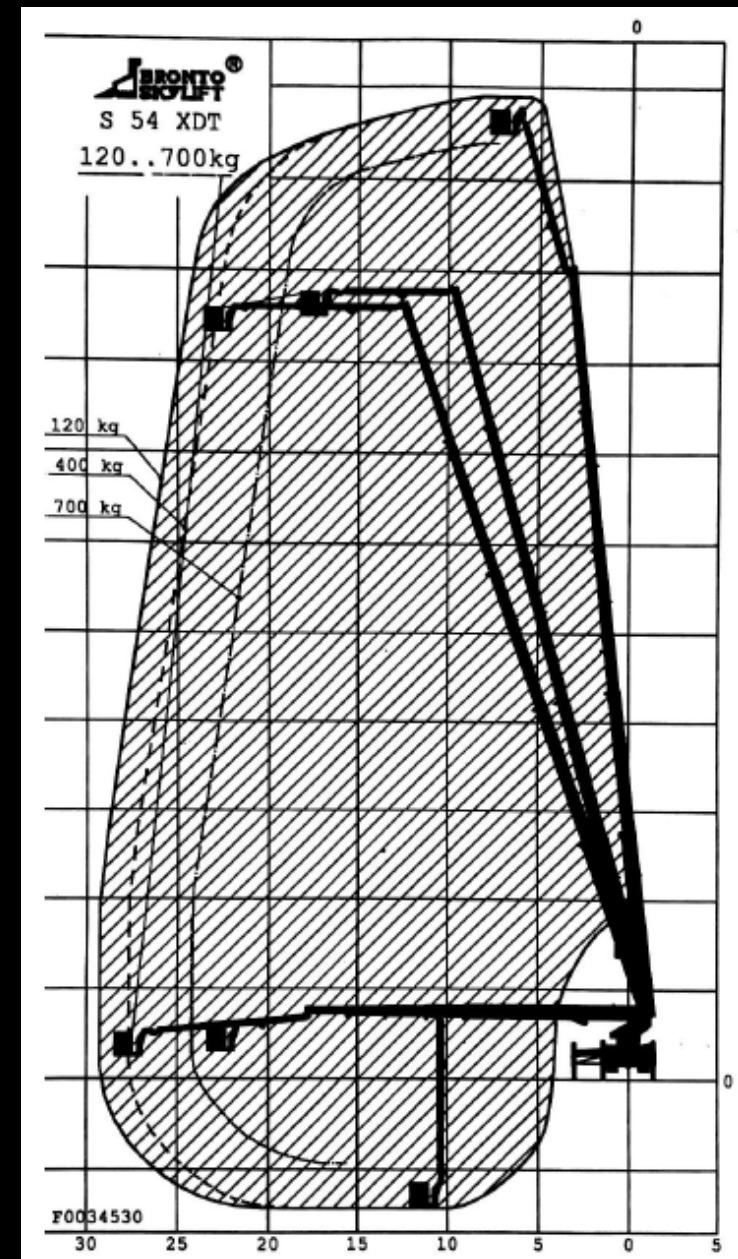





0488 TOWERS



admin@quantumcomms.com.au

**U1/4-6 Nova Court
Craigieburn VIC 3064**

